



**MICROPHONE
ISOLATION SHIELD**

USER MANUAL



Model: KN-MIP01

**Please read all instructions before use for best performance of this product.
Save these instructions for future reference.**




WELCOME!

Dear Knox Gear customer,

Congratulations on your purchase of the Knox Gear Microphone Isolation Shield. With normal use and proper treatment, it will provide you with years of reliable service. Please read this manual carefully before using this product, and keep it in a safe place for future reference.

We hope you enjoy your new Knox Gear Microphone Isolation Shield. For technical assistance and warranty service, please email us at **cs@knoxgear.com**.

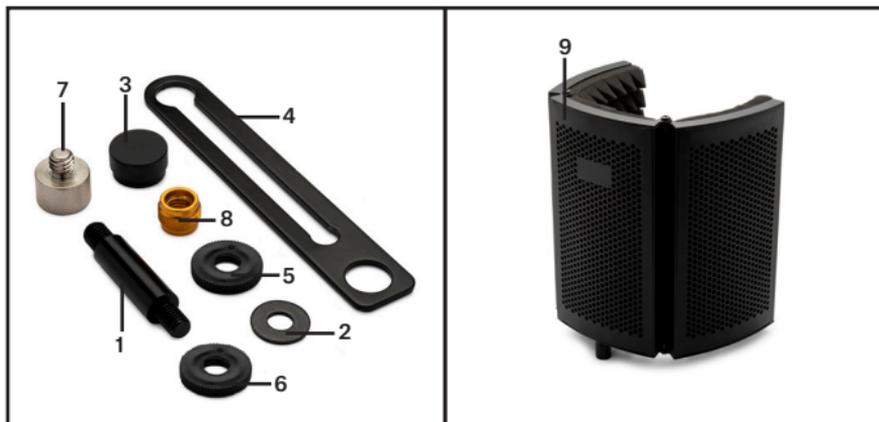

1. Connecting rod
2. Washer
3. Connecting rod nut
4. Crossbar
5. 3/8" gasket (optional)
6. 5/8" gasket (optional)
7. 5/8" female to 3/8" male adapter
8. 3/8" female to 5/8" male adapter
9. Isolation shield

NOTE: This product does not include a microphone or shock mount.

Step 1: Mount the crossbar onto the neck of the microphone stand (not included).

(1) If using a stand with a 5/8" thread, mount using the 5/8" hole at the end of the crossbar, as pictured. Insert the thread into the hole, and then attach the included 5/8" female to 3/8" male adapter.



(2) If using a stand with a 3/8" thread, mount using the smaller 3/8" semicircular hole.



(3) Use the included gaskets to hold the bracket in place, if necessary.

(4) Screw the isolation shield onto the microphone stand.

Step 2: Connect a shock mount or microphone (not included).



(5) Attach a shock mount or microphone (not included) to the connecting rod.

(a) If using a microphone or shock mount with 5/8" threading, use 3/8" female to 5/8" male adapter.

(6) Mount the connecting rod to the crossbar with the washer and connecting rod nut.

(7) Tighten the connecting rod in place.

